


It's an **Emak S.p.A.** trademark 42011 Bagnolo in Piano (RE) Italy Tel. +39 0522 956611 • Fax +39 0522 951555 **info@myefco.com • www.myefco.com** ^{Ywe} www.youtube.com/MyEfco

NEW CHAINSAW MTT 3600






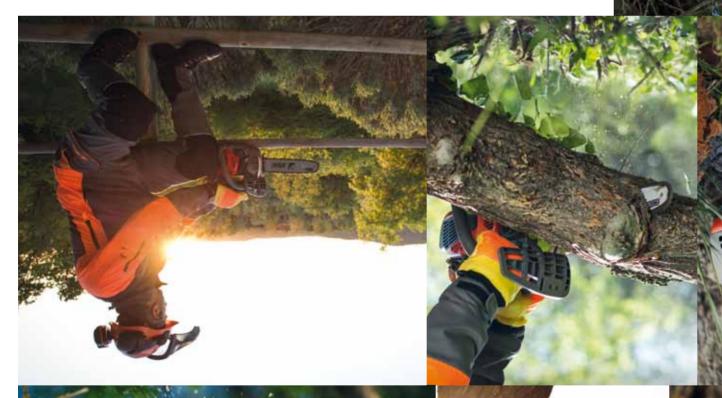





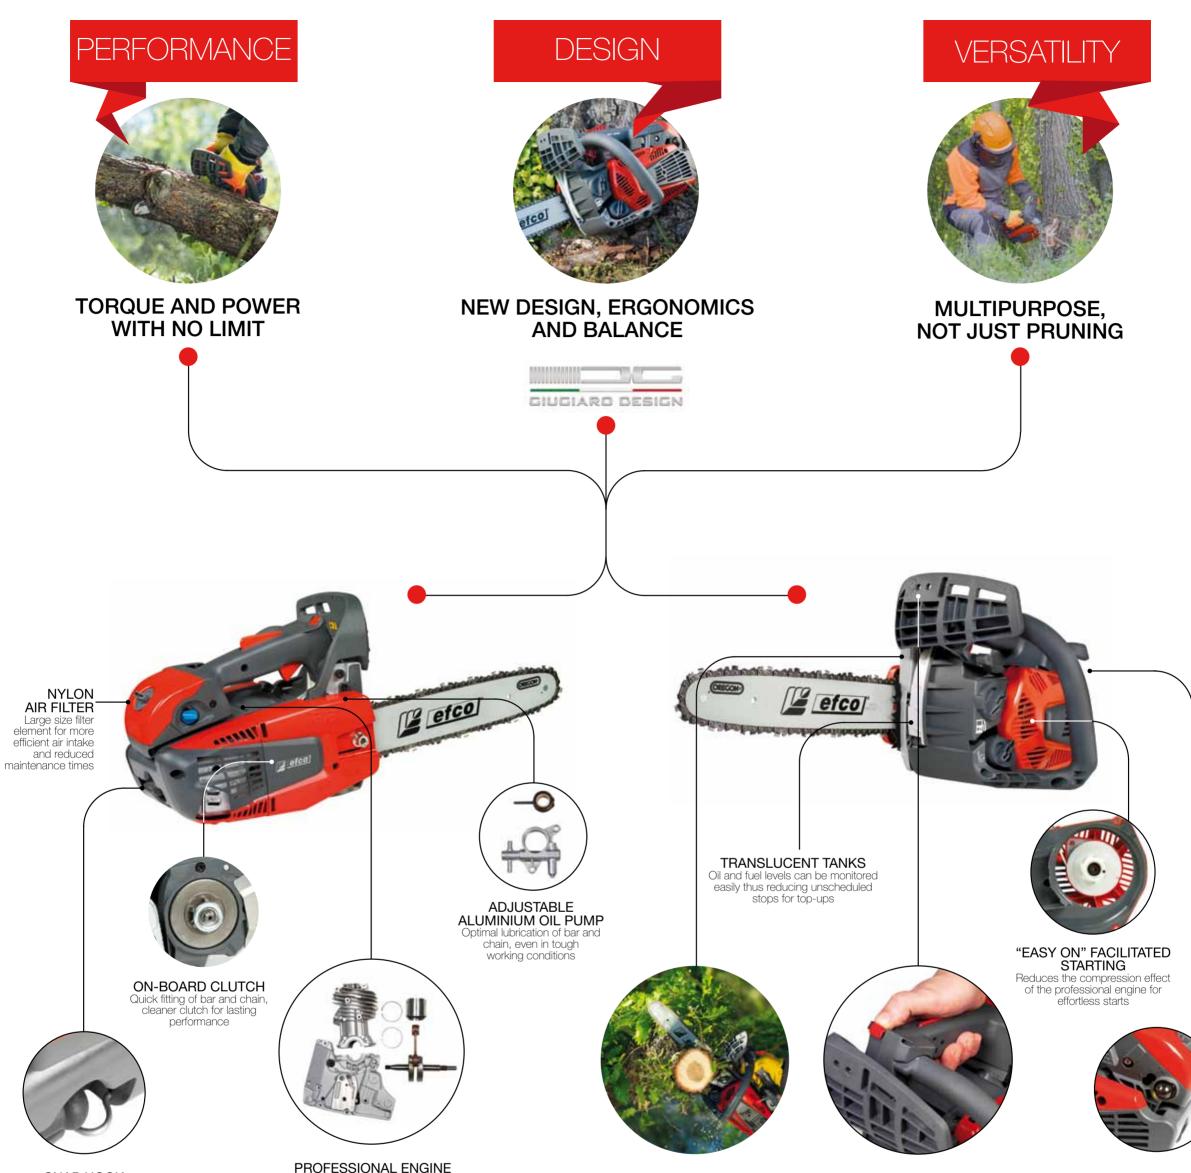

SNAP HOOK Fold away steel snap hook designed for rapid attachment of the tool to the operator's harness

Light alloy crankcase

Nickel plated cylinder

Two-ring piston

• Two-part forged crankshaft

ALUMINIUM BAR CASE

Greater endurance and performance during the toughest conditions (standard metal spike)

"ALWAYS-ON" SWITCH

Fast stopping and always ready to restart thanks to the spring return function

AIR PURGE Assists cold starts and starting after refuelling

PROTECTIVE CLOTHING







Tree climbing trousers with anti-cut protection, resistant to chain speeds of up to 20 m/sec

Anti-cut forestry boots with reinforced toecap, resistant to chain speeds of up to 24 m/sec



Professional protective helmet with integral face shield and noise filtering ear defenders

Jacket with anti-cut protection, resistant to chain speeds of up to 20 m/sec

For sound advice, just ask our authorized dealer.

TECHNICAL SPECIFICATIONS

POWER/DISPLACEMENT	2.0 HP – 1.5 kW/35.1 cm ³
BAR LENGTH (nose)	30-35 cm/12"-14" (sprocket)
CHAIN (pitch x gauge)	3/8" x .050" (sprocket)
CHAIN TENSION ADJUSTER	lateral
OILER	adjustable aluminium /zero flow rate at idle speed
OIL RESERVOIR / FUEL TANK CAPACITY	0.23 1/0.28 1
TANK FILLER NECK	Ø 28 (fuel) / Ø 24 (oil)
CLUTCH	On-Board
ON-OFF SYSTEM	Alaways-On
DRY WEIGHT WITHOUT BAR AND CHAIN	3.8 Kg